


AQUAVISION

24" Widescreen Model AVF24W-4S LCD

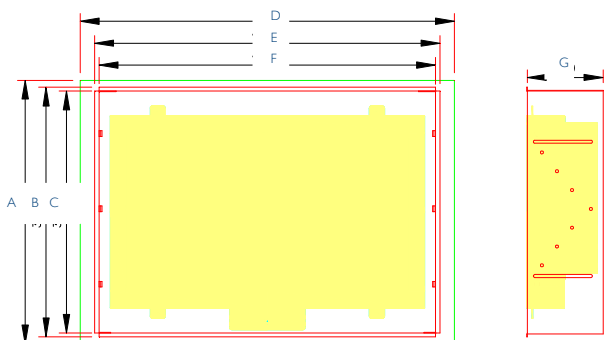

Model	Screen Size	A Overall Height	B Bezel Height	C Cut-out Height	D Overall Width	E Bezel Width	F Cut-out Width	G Overall Depth	Screen Resolution	Viewing Angle	Brightness	Contrast
AVF-24-4S	24"	472mm	444mm	437mm	702mm	664mm	656mm	90mm	1920 x 1200	H 89° x 89° V 89° x 89°	400cd/m ²	1000:1

Screen

HD LCD TFT (16:9)
PAL/SECAM-B/G, D/K, L
Full Auto Tuning
TeleText/FastText
Heated Screen
Supported Signals: HDMI 1920x1080p (50/60), 1280x720p (50/60), 720x576p (50), 720x480p (60), 640x 480p (50/60)

Inputs

1 x Scart (Fully Wired R, G, B.)
1 x Scart (Half Wired)
1 x Composite AV (Yellow, Red and White)
1 x S- Video
1 x PC D- Connector + 3.5mm Audio
1 x Analogue & Digital Tuner
1 x Component Video
2 x HDMI input

Other Features

Built in games
Fixed Audio Output
Variable Audio output
NICAM Stereo
Auto Volume Control
Heated Screen
Programming Remote Control
Waterproof Remote Control
LCD TFT 3D De-interlacer
3D Noise Reduction
3D Comb Filter
Full Auto Tuning

Sound

Nicam Stereo
2 x 3Watts (PMPO) 8Ohms
5 Band Graphic Equaliser

Power

24 volts DC Transformer
4m Low Voltage Lead.
UK or EU power leads supplied
Auto sensing 90-240VAC
Power Consumption 60W
Standby Consumption <3w

Selectable Options

Black, White, or MirrorVision Glass
Other colours/finishes available to special order.

Optional

- RSP4 Hard wired control panel with switch mimic connection
- Wall or Ceiling mounted speakers
- SKY IR Pass Through



The specifications shown were accurate at time of going to press. AQUAVISION'S® policy of continuous development means some changes may take place. Please check with the office for confirmation. All screen pictures simulated. All names and trademarks acknowledged. E. & O.E. Model shown AVF32-4M
REV 40.3